



PROTECTIVE INDUSTRIAL PRODUCTS

441 Basic Goggles Specification Sheet

SAFETY EYEWEAR

PRODUCT DESCRIPTION:

Bouton Basic Goggles, indirect vent, full polycarbonate frame, anti-scratch lenses, elastic braid strap.

- Universal goggle design;
- Indirect side ventilation via hooded vents;
- Meets ANSI Z87.1+ High Impact Requirements;
- Fits over most prescription eyewear;
- Pliable one-piece frame;

Applications:

Used for general manufacturing and anywhere eye protection is needed, for work, play, and home projects.

TECHNICAL DATA:

Packaging: 1 unit per polybag, 144 units per case

Case Dimensions: (cm) - 49 x 30 x 27 / (in) - 19.3 x 11.8 x 10.6

Case Weight: 15.5 lbs / 7.0 kg

Country of Origin/Harmonization Code: Malaysia/9004.90.0000

Frame Design: Full polycarbonate single lens, non-toxic PVC frame

Strap: 0.375" Elastic Braid, threaded through frame, adjustment through lugs in goggle body

Ventilation: 4 polycarbonate hooded vents, 2 each side, ultrasonically welded together

Color: Clear Transparent




Polycarbonate lenses block 99.9% of the sun's ultraviolet rays. This ultraviolet protection has already been incorporated within the lens material when the lenses are being produced.

Item #	Lens Material	Lens Color	Lens Coating	Frame Color	UPC #	UPC # Case
248-4401-300	Polycarbonate, 0.069 CT	Clear	Anti-scratch	Clear transparent	01616314102645	02616314102644
248-4401-400	Polycarbonate, 0.069 CT	Clear	Anti-scratch, anti-fog	Clear transparent	01616314102669	02616314102668

DIMENSIONS:

Size Available	One size
Overall Length (mm) – A (in)	69.0 2.7
Lens Height (mm) – B (in)	89.0 3.5
Overall Width (mm) – C (in)	178.0 7.0

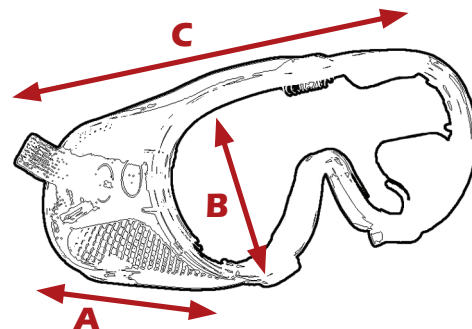

This document is the property of PIP and the information contained herein is proprietary to PIP.

Protective Industrial Products | 26 Computer Drive East | Albany, NY 12205

Phone: 518-861-0133 | Toll free: 800-262-5755 | Fax: 518-861-0144 | www.pipusa.com | sales@pipusa.com