



# SPECIFICATION SHEET

343-1756



## ANSI TYPE R CLASS 3 7-IN-1 ALL CONDITIONS COAT WITH INNER JACKET & VEST COMBINATION

- Durable waterproof polyester with taped seams
- Lined with polyester mesh and smooth taffeta nylon
- High fleece lined collar with rollaway hood
- Heavy duty zipper closure with storm flap secured with snaps
- 2" 3M Scotchlite silver reflective material
- Fully reversible to black with zip-off sleeves
- 2 lower flap pockets, 1 ID pocket, 1 radio pocket
- Internal upper pen pockets and zippered hideaway pocket,  
1 internal lower pocket with tab closure

### APPLICATIONS

- Construction
- Municipal
- Shipyards
- Anywhere hi-visibility apparel is necessary

### CARE INSTRUCTIONS

Recommend washing in tempered water not exceeding 104°F or 40°C. Wash in a 5-10 minute cycle time or hand wash. Rinse in cold water. Tumble dry at temperature not exceeding 104°F or 40°C, do not wring. Do not wash in biological powder, wash as synthetics. Maximum of 25 wash cycles

### TECHNICAL DATA

MATERIAL	100% Polyester
CONSTRUCTION	Main: 190g/m <sup>2</sup> 100% polyester 300D Oxford with PU coating Insulated Lining: 40g neutral cotton, 160g/m <sup>2</sup> 100% quilted padding Closure: #5 Resin 2 way zipper
COLOR	Hi-Vis Lime Yellow or Hi-Vis Orange
SIZES	S - 5X
PACKAGING	1 per polybag, 10 per case
CASE DIMENSIONS	26.4" x 16.9" x 16.9" / 67cm x 43cm x 43cm
CASE WEIGHT	51 lb / 23.5 kg
COO	China




### DIMENSIONS (in/cm)

	S	M	L	XL	2X	3X	4X	5X
<b>A</b>	48 / 121.9	52.6 / 133.6	55.5 / 141	58.5 / 148.6	61.4 / 156	64.4 / 163.6	67.3 / 170.9	70.3 / 178.6
<b>B</b>	34.5 / 87.6	34.5 / 87.6	35 / 88.9	35 / 88.9	36.2 / 91.9	36.2 / 91.9	37 / 94	37 / 94
<b>C</b>	25 / 63.5	25 / 63.5	25.5 / 64.8	25.5 / 64.8	26 / 66	26 / 66	27 / 68.6	27 / 68.6

### BARCODES

ITEM	BAG	DOZEN	CASE
343-1756-YEL/S	01616314066459	---	02616314066458
343-1756-YEL/M	01616314066442	---	02616314066441
343-1756-LY/L	01616314066435	---	02616314066434
343-1756-LY/XL	01616314079381	---	02616314079380
343-1756-LY/2X	01616314066398	---	02616314066397
343-1756-LY/3X	01616314066404	---	02616314066403
343-1756-LY/4X	01616314066411	---	02616314066410
343-1756-LY/5X	01616314066428	---	02616314066427
343-1756-OR/S	01616314082121	---	02616314082120
343-1756-OR/M	01616314082138	---	02616314082137
343-1756-OR/L	01616314082145	---	02616314082144
343-1756-OR/XL	01616314082152	---	02616314082151
343-1756-OR/2X	01616314082169	---	02616314082168
343-1756-OR/3X	01616314082176	---	02616314082175
343-1756-OR/4X	01616314082183	---	02616314082182
343-1756-OR/5X	01616314082190	---	02616314082189

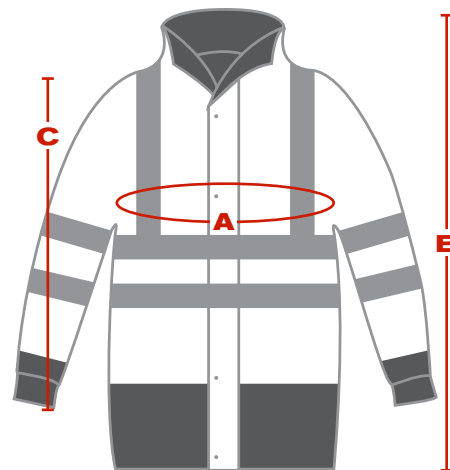

## PROTECTIVE INDUSTRIAL PRODUCTS, INC. | BRINGING THE BEST OF THE WORLD TO YOU®

AMERICAS: (800) 262-5755 • (518) 861-0133 | EUROPE: +34-96182-41-48 | AMEA: (ASIA, MIDDLE EAST, AFRICA) 852-2475-9228 | www.pipglobal.com

This document and the information contained herein is the property of Protective Industrial Products, Inc. (PIP) and may not be used or reproduced without permission. Product users should conduct all appropriate testing or other evaluations to determine the suitability of PIP products for a particular purpose or use within a particular environment. PIP DISCLAIMS ALL WARRANTIES OTHER THAN AS EXPRESSLY PROVIDED.